



NetAstra SU 3x25 A

Subscriber Unit – NetAstra SU 3x25 A

NetAstra SU 3x25 A is a Subscriber Unit (SU), providing high capacity access connectivity of up to 25 Mbps net aggregate throughput.

NetAstra SU 3x25 A supports 3.4 to 3.6 GHz and complies with ETSI regulations.

NetAstra SU 3x25 A comes with an integrated antenna.

Product Highlights

- Up to 25 Mbps net aggregate throughput
- Long range – up to 40 km/25 miles
- Guaranteed Service Level Agreement (SLA) per SU
- Outstanding short and constant latency
- Advanced MIMO, OFDM and Diversity technologies
- Robust and reliable operation in tough conditions, extreme temperatures and non line-of-sight scenarios
- Ease of operation and maintenance



Product Specifications

Configuration

Architecture	Outdoor Unit with integrated antenna
PoE to ODU Interface	Outdoor CAT-5e cable; Maximum cable length: 100 m for 10/100BaseT and 75 m for 1000BaseT

Radio

Capacity	25 Mbps net aggregate throughput
Range	Up to 40 km / 25 miles
Channel Bandwidth	Configurable: 5, 10, 20 and 40 MHz (for the default band)
Modulation	2x2 MIMO-OFDM (BPSK/QPSK/16QAM/64QAM)
Adaptive Modulation & Coding	Supported
DFS	Not Supported (for the default band)
Diversity	Supported
Max Tx Power	25 dBm
Duplex Technology	TDD
Error Correction	FEC k = 1/2, 2/3, 3/4, 5/6
Encryption	AES 128; FIPS 197; AES 256 optional (via Software License Key)
Bandwidth allocation	Configurable: Symmetric and Asymmetric
Support Indoor units	Netronics PoE devices
Layer 2	Hub Mode
QoS	Packet classification to 4 priority queues according to 802.1p and Diffserv
VLAN Support	802.1Q, QinQ, 4094 VLANS

Supported Bands

Band	Channel BW 5 MHz	Channel BW 10 MHz	Channel BW 20 MHz	Channel BW 40 MHz	Radio Compliance
3.5 GHz ETSI*	3.4105 - 3.7025	3.408 - 3.705	3.403 - 3.710	3.393 - 3.720	EN 302 326-2
3.413-3.480 GHz ETSI	-	3.408 - 3.485	3.403 - 3.490	3.393 - 3.500	EN 302 326-2
3.480-3.600 GHz ETSI	-	3.475 - 3.605	3.470 - 3.610	3.460 - 3.620	EN 302 326-2
3.6 GHz ETSI	-	3.595 - 3.705	3.590 - 3.710	3.580 - 3.720	EN 302 326-2

* Default Band


Mechanical	
ODU Dimensions	37(w) x 37(h) x 11(d) cm
ODU Weight	3.6 kg / 7.94 lbs
Power	
Power Feeding	Power provided over ODU-IDU cable
Power Consumption	<20 W
Environmental	
Operating Temperatures	-35°C to 60°C / -31°F to 140°F
Humidity	100% condensing, IP67 (totally protected against dust and against immersion up to 1 m)
Safety	
FCC/IC (cTUVus)	UL 60950-1, UL 60950-22, CAN/CSA C22.2 60950-1, CAN/CSA C22.2 60950-22
ETSI	EN/IEC 60950-1, EN/IEC 60950-22
EMC	
FCC	47 CFR Class B, Part15, Subpart B
ETSI	EN 300 386, EN 301 489-1, EN 301 489-4
CAN/CSA-CEI/IEC	CISPR 22-04 Class B



Integrated Antenna

Gain	19.5 dBi
VSWR	2.0 : 1
3 dB Beam width	15° (typ)
AZ & EL Beam Squint	0
Polarization	Dual Linear (Vertical and Horizontal)
Side lobes Level	ETSI EN 302 326-3 V 1.3.1 DN3
Cross Polarization	ETSI EN 302 326-3 V 1.3.1 DN3
F/B Ratio	-20 dB
Port To Port Isolation	30 dB (typ)
Lightning Protection	DC grounded

Antenna Pattern

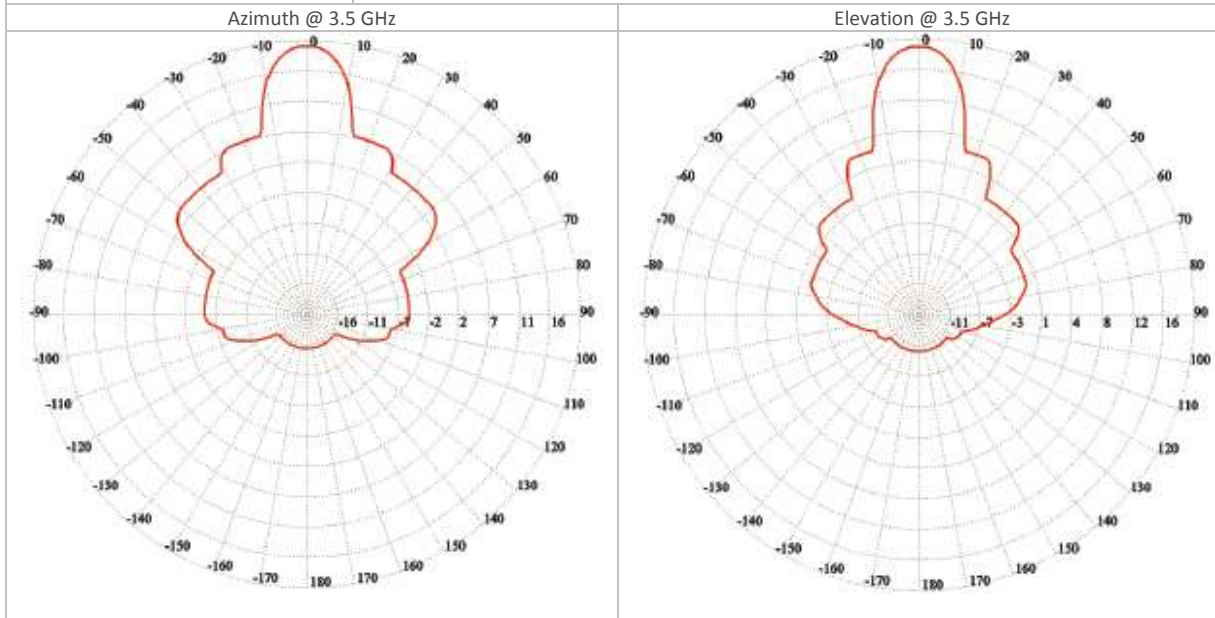

600-15 Allstate Parkway, Markham
Ontario, Canada
Tel: +1 (905) 415 4585
Email: info@netronics-networks.com

Netronics-networks.com